


## DOWNLIGHT STANDARD

### O-DWN-172

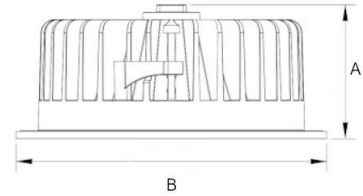

Model	Size A	Size B	Cut-out
15W	69mm	145mm	125mm
24W	86mm	190mm	165mm
30W	99mm	230mm	200mm
40W	99mm	230mm	200mm

Compact and powerful downlight range from 15W to 40W, and 145mm to 230mm. Easy to install with clips and tool free connector. Opal diffuser for a perfect visual comfort. The separate driver ensures good heat dissipation and allows all types of dimming.

Gamme de downlights compacts et puissants de 15W, 20W, 30W et 40W. Dimensions de 145mm à 230mm. Facile à installer avec un connecteur rapide et des clips de fixation. Réflecteur opale qui assure un confort visuel optimal. Le driver séparé permet une meilleure dissipation de la chaleur, ainsi que tout type de gradation.

AC Input	100 – 240V	<i>Alimentation</i>
Light Source	SMD	<i>Source</i>
Wattage	15W   24W   30W   40W	<i>Puissance</i>
Lumen Output	1293Lm   1800Lm   2200Lm   3100Lm	<i>Flux lumineux</i>
Beam Angle	90°	<i>Angles</i>
Color (K)	3000°K   4000°K   5000°K	<i>Température</i>
Finish	White	<i>Finition</i>
Working temperature	-20° / +40°C	<i>Température de fonctionnement</i>
Lifetime	50,000h	<i>Durée de vie</i>
Protection	IP20	<i>Indice</i>
Dimming	1-10V   DALI   Phase dimming	<i>Contrôle</i>
Certification	CE   ENEC   RoHS	<i>Certification</i>
CRI	80+, 90+	<i>IRC</i>



Al Quoz | Industrial 3 | Street 4c | Dubai | U.A.E  
Tel | +971 4 321 6376



20 Bis Rue Louis Philippe | 92220 Neuilly Sur Seine | France  
Tel | +33 1 40 92 7028