


GROUND LIGHT P-GRD-5.5-DRIVE

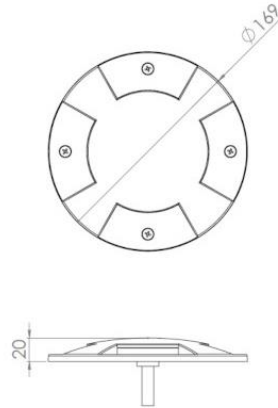

4 ways flat drive-over ground marker with 1.2 tons load capacity. Surface installation without recessing pot. Die cast aluminium body, stainless steel version on request. 170mm diameter, delivered with 1.5m cable. Openings can be configured with specific accessories. Perfect for parking and driveways.

Marqueur de sol à 4 ouvertures. Supporte 1.2 tonnes de charge. Installation sans pot d'encastrement. Corps en fonderie d'aluminium disponible aussi en version acier inoxydable. Diamètre 170mm, livré avec câble HO7RN de 1.5m. Accessoires disponibles pour changer le nombre d'ouvertures. Idéal pour les parkings et rampes.

AC Input	AC 230V	<i>Alimentation</i>
Light Source	SMD	<i>Source</i>
Wattage	5.5W	<i>Puissance</i>
Lumen Output	460Lm	<i>Flux lumineux</i>
Beam Angle	N/A	<i>Angles</i>
Color (K)	2700°K 3000°K 4000°K 5000°K	<i>Température</i>
Finish	Dark grey	<i>Finition</i>
Working temperature	-20° / +55°C	<i>Température de fonctionnement</i>
Lifetime	60,000h	<i>Durée de vie</i>
Protection	IP67	<i>Indice</i>
Dimming	No	<i>Contrôle</i>
Certification	CE RoHS	<i>Certification</i>
CRI	80+	<i>IRC</i>



Al Quoz | Industrial 3 | Street 4c | Dubai | U.A.E
Tel | +971 4 321 6376



20 Bis Rue Louis Philippe | 92220 Neuilly Sur Seine | France
Tel | +33 1 40 92 7028