


GRID

S-GRD-10 | 3

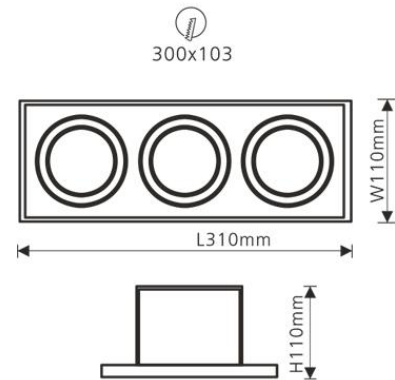

Trimless ceiling recessed grid light, 1x 9W, 2x 9W, 3x 9W COB powered. Small form factor for easy integration in ceilings. Double axis adjustable.

Projecteur encastré plafond type grid trimless multi spots petit format, 1x 9W, 2x 9W, 3x 9W. Ajustable sur 2 axes de rotation. Installation simple par clips.

AC Input	100 – 240V	Alimentation
Light Source	COB	Source
Wattage	3x 9W	Puissance
Lumen Output	3x 800Lm	Flux lumineux
Beam Angle	16° 28° 40° 60°	Angles
Color (K)	2700°K 3000°K 4000°K	Température
Finish	Black White	Finition
Working Temperature	-20° / +40°C	Température de fonctionnement
Lifetime	50,000h	Durée de vie
Protection	IP20	Indice
Dimming	1-10V Optional DALI Phase dimming	Contrôle
Certification	CE ROHS	Certification
CRI	80+, 90+	IRC



Al Quoz | Industrial 3 | Street 4c | Dubai | U.A.E
Tel | +971 4 321 6376



20 Bis Rue Louis Philippe | 92220 Neuilly Sur Seine | France
Tel | +33 1 40 92 7028