

## RECESSED DOWNLIGHT


### S-DWN-REG95S



Adjustable recessed square downlight, with trim and trimless option. Tilting angle 30° and rotation angle 350° with beam angle available in 20°, 30° and 40°. Easy clip installation and tool free connector.

*Downlight carré encastré orientable, option en trimless disponible. Angle d'inclinaison 30° et angle de rotation 350° avec différents faisceaux disponibles : 20°, 30° et 40°. Installation facile.*


|                       |                               |                                      |
|-----------------------|-------------------------------|--------------------------------------|
| AC Input              | 220 – 240 V                   | <i>Alimentation</i>                  |
| Light Source          | COB                           | <i>Source</i>                        |
| Wattage               | 20W                           | <i>Puissance</i>                     |
| Lumen Output          | 1648Lm                        | <i>Flux lumineux</i>                 |
| Efficiency            | 82Lm/W                        | <i>Efficacité</i>                    |
| Beam Angle            | 20°   25°   38°   Wall Washer | <i>Angles</i>                        |
| Dimensions (Cut hole) | 95mm dia                      | <i>Dimensions (trou découpé)</i>     |
| Color (K)             | 2700°K   3000°K   4000°K      | <i>Température de couleur</i>        |
| Finish                | Black   White                 | <i>Finition</i>                      |
| Working Temperature   | -30° / +40°C                  | <i>Température de fonctionnement</i> |
| Lifetime              | 50,000h                       | <i>Durée de vie</i>                  |
| Standard              | L80B10                        | <i>Norme</i>                         |
| Protection            | IP20                          | <i>Indice</i>                        |

|                  |   |                           |
|------------------|---|---------------------------|
| Dimming (Option) | DALI   1-10V   Phase Dimming  | <i>Gradation (Option)</i> |
| Certification    | CE   RoHS   | <i>Certification</i>      |
| CRI              | 90  | <i>IRC</i>                |
| Safety Class     |  | <i>Classe de sécurité</i> |
| EN62471          | RG0   | <i>EN62471</i>            |
| SDCM             | ≤3  | <i>SDCM</i>               |
| UGR              | ≤19   | <i>UGR</i>                |

## Trim option / *Trimless option*



Square Trim




Square Trimless

## Optical accessory / *Accessoires optiques*




A-Regular

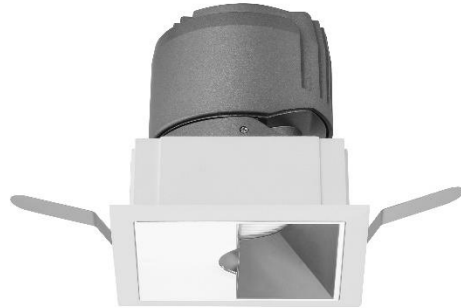

B-Washer

## Dimensions | *Dimensions*

Cut hole  $\varnothing 95\text{mm}$

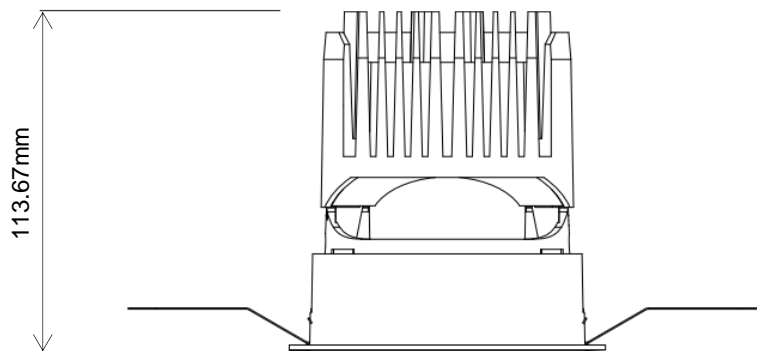

## Product Code Generator / *Générateur de code produit*

