

## LED SPOT TRACKLIGHT

### S-TRL-TL29




Professional lighting tools for high demanding retail environments. Die cast aluminium body. Wide range of optics to adapt to all kind of merchandising schemes. Compatible with standard 3 circuits tracks, it exists in surface or ceiling recessed version. Full range of accessories: honeycomb, gasket, barn doors.

*Projecteur sur rail professionnel pour l'éclairage de surfaces de vente. Corps en aluminium moulé. Large gamme d'optiques pour s'adapter à toute configuration de magasin. Compatible avec la majorité des rails 3 allumages du marché, disponible en montage suspendu, saillie ou encastrément plafond. Possibilité d'ajouter des accessoires type volets, filtres, ou nids d'abeille.*


|                     |                               |                                      |
|---------------------|-------------------------------|--------------------------------------|
| AC Input            | 220 – 240V                    | <i>Alimentation</i>                  |
| Light Source        | COB                           | <i>Source</i>                        |
| Wattage             | 8W   12W   15W                | <i>Puissance</i>                     |
| Lumen Output        | 895Lm   1345Lm   1680Lm       | <i>Flux lumineux</i>                 |
| Efficiency          | 112Lm/W                       | <i>Efficacité</i>                    |
| Beam Angle          | 16°   24°   36°               | <i>Angles</i>                        |
| Color (K)           | 2700°K   3000°K   4000°K      | <i>Température de couleur</i>        |
| Finish              | Black   White   <b>Custom</b> | <i>Finition</i>                      |
| Working Temperature | -20° / +40°C                  | <i>Température de fonctionnement</i> |

|                  |                              |                           |
|------------------|------------------------------|---------------------------|
| Lifetime         | 50,000h                      | <i>Durée de vie</i>       |
| Standard         | L80B10                       | <i>Norme</i>              |
| Protection       | IP20                         | <i>Indice</i>             |
| Dimming (Option) | DALI   1-10V   Phase Dimming | <i>Contrôle (Option)</i>  |
| Certification    | CE   RoHS                    | <i>Certification</i>      |
| CRI              | 80   90                      | <i>IRC</i>                |
| Safety Class     | ⊕                            | <i>Classe de sécurité</i> |
| EN62471          | RG0                          | <i>EN62471</i>            |
| SDCM             | ≤3                           | <i>SDCM</i>               |
| UGR              | ≤13                          | <i>UGR</i>                |

## Dimensions | *Dimensions*

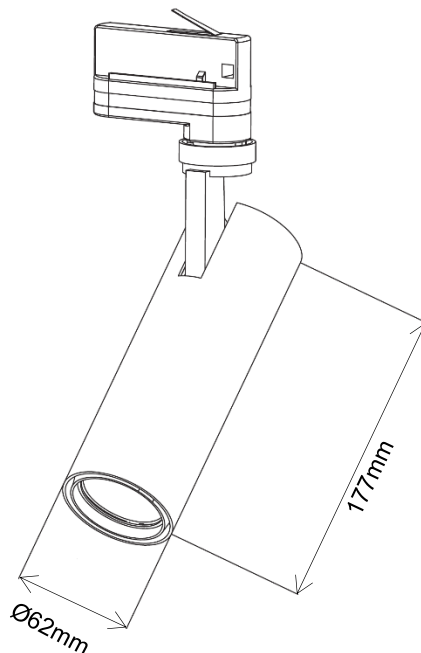

## Product Code Generator / *Générateur de code produit*

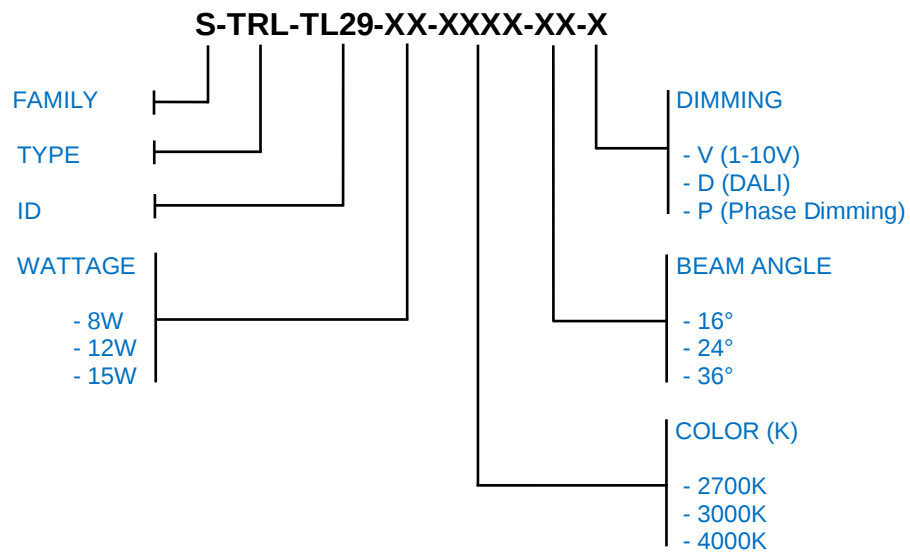

## ACCESSORIES | *ACCESSOIRES*


1. Honeycomb | *Nid d'abeille*
2. Gasket | *Joint*
3. Barn door | *Flaps*



1



2



3