

LED STRIP

L-STP-3528-15



This 15W/m LED strip comes in a range of color temperature from 2700K to 6000K. Perfect for indirect lighting applications such as cove lights. Easy to install with only 33.3mm cutting unit. Delivered standard in 5m roll. Available IP20 to IP66.

Ruban LED 15W/m. Gamme de couleur de 2700 à 6000K. Parfait pour l'éclairage indirect en corniche. Très facile d'installation avec une unité de coupe minimum de 33.3mm. Livré en rouleau de 5m, en IP20 ou IP66.

AC Input	DC 24V	<i>Alimentation</i>
Light Source	SMD	<i>Source</i>
Wattage	15W/m	<i>Puissance</i>
Lumen Output	1700Lm/m	<i>Flux lumineux</i>
Efficiency	113Lm/W	<i>Efficacité</i>
Beam Angle	120°	<i>Angles</i>
Color (K)	2700°K 3000°K 4000°K 6000°K	<i>Température</i>
Finish	White PCB	<i>Finition</i>
Working Temperature	-30° / +45°C	<i>Température de fonctionnement</i>
Lifetime	50,000h	<i>Durée de vie</i>


LUMEN AT WORK

Standard	L80B10	Norme
Protection	IP20 IP66	Indice
Dimming (Option)	1-10V DALI Phase Dimming	Contrôle (Option)
Certification	CE RoHS	Certification
CRI	80+ 90+	IRC
Safety Class	III	Classe de sécurité
EN62471	RG0	EN62471
SDCM	≤3	SDCM


Product Photo / Photo du produit



Dimensions | Dimensions

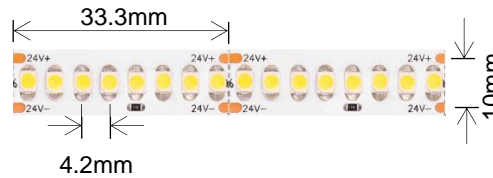

Product Code Generator / Générateur de code produit

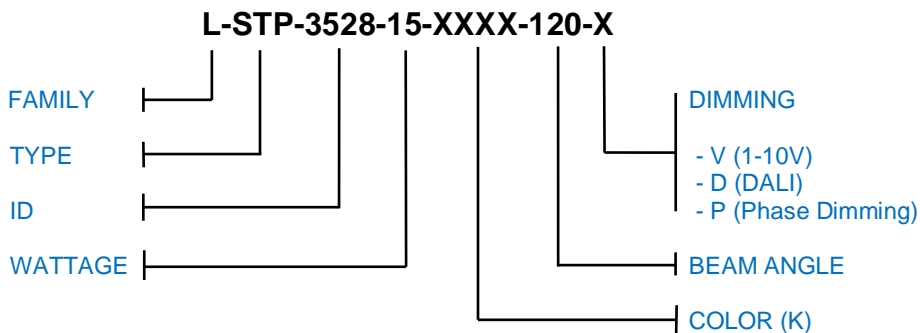

contact@lumen-at-work.com | www.lumen-at-work.com

© LUMEN AT WORK. All rights reserved. The information provided herein is subject to change, without notice.