

LED T8 TUBE

I-TBE-08




Direct retrofit T8 LED tube. Available in 600mm / 900mm / 1200mm and 1500mm. 180° rotating adapter. The PC diffuser is available clear or frosted. Fuse for magnetic ballasts direct replacement available. Electronic ballasts should be bypassed. Very high efficiency 130Lm/W.

Tube LED en remplacement de tubes fluorescents. Disponible en longueur 600mm / 900mm / 1200mm / 1500mm. Embouts rotatifs 180° pour ajuster la direction du flux. Fusibles pour remplacement de luminaire avec ballasts magnétiques disponibles. Les ballasts électroniques doivent être shuntés. Haute efficacité 130Lm/W.


AC Input	100 – 240V°	<i>Alimentation</i>
Light Source	SMD 2835	<i>Source</i>
Wattage	11W 17W 20W 24W	<i>Puissance</i>
Dimensions	600mm 900mm 1200mm 1500mm	<i>Dimensions</i>
Lumen Output	1430Lm 2210Lm 2600Lm 3120Lm	<i>Flux lumineux</i>
Efficiency	130Lm/W	<i>Efficacité</i>
Beam Angle	120°	<i>Angles</i>
Color (K)	3000°K 4000°K 5000°K 6500°K	<i>Température</i>
Finish	Silver, Blue	<i>Finition</i>
Working temperature	-20° / +40°C	<i>Température de fonctionnement</i>
Lifetime	74,000h	<i>Durée de vie</i>
Standard	L80B10	<i>Norme</i>
Protection	IP20	<i>Indice</i>

Dimming (Option)	No	<i>Classe de sécurité</i>
Certification	CE ENEC ROHS	<i>Certification</i>
CRI	80 90	<i>IRC</i>
Electrical Class	<input type="checkbox"/>	<i>Classe électrique</i>
EN62471	RG0	<i>EN62471</i>
SDCM	<3	<i>SDCM</i>
UGR	<22	<i>UGR</i>

Product Photo | *Photo du produit*

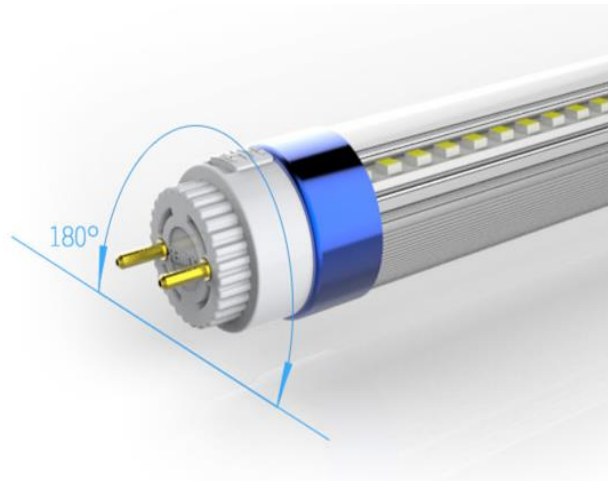

Dimensions | *Dimensions*

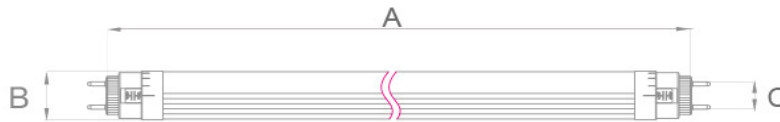

Model	Size A (mm)	Size B (mm)	Size C (mm)
I-TBE-08-600mm	600mm	26mm	G13
I-TBE-08-900mm	900mm	26mm	G13
I-TBE-08-1200mm	1200mm	26mm	G13
I-TBE-08-1500mm	1500mm	26mm	G13

Product Code Generator | *Générateur de code produit*

