

LED LINEAR PROFILE


L-LCL-5536



Slim elegant and powerful linear profile. The 5536 can be installed recessed. With the connection kit and the magnetic end caps, you can connect several pieces to address your architectural needs.

Profil linéaire mince, élégant et puissant. Le 5536 peut être installé encastré. Avec le kit de connexion et les embouts magnétiques, vous pouvez connecter plusieurs pièces pour répondre à vos besoins architecturaux.


AC Input	100 – 277 V	<i>Alimentation</i>
Light Source	SMD	<i>Source</i>
Wattage	20W/m	<i>Puissance</i>
Lumen Output	2200Lm/m	<i>Flux lumineux</i>
Efficiency	105Lm/W	<i>Efficacité</i>
Beam Angle	93°	<i>Angles</i>
Color (K)	3000°K 4000°K 6000°K	<i>Température</i>
Finish	Silver White Black	<i>Finition</i>
Working Temperature	-20° / +45°C	<i>Température de fonctionnement</i>
Lifetime	50,000h	<i>Durée de vie</i>
Standard	L80B10	<i>Norme</i>

Protection	IP40	<i>Indice</i>
Dimming (Option)	1-10V DALI Phase Dimming	<i>Contrôle (Option)</i>
Certification	CE RoHS	<i>Certification</i>
CRI	80+ 90+	<i>IRC</i>
Safety Class		<i>Classe de sécurité</i>
EN62471	RG0	<i>EN62471</i>
SDCM	≤3	<i>SDCM</i>
UGR	≤19	<i>UGR</i>


Product Photo | *Photo du produit*



Dimensions | *Dimensions*

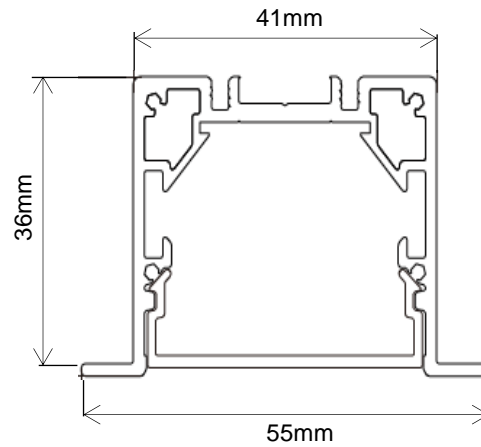


Product Code Generator | *Générateur de code produit*

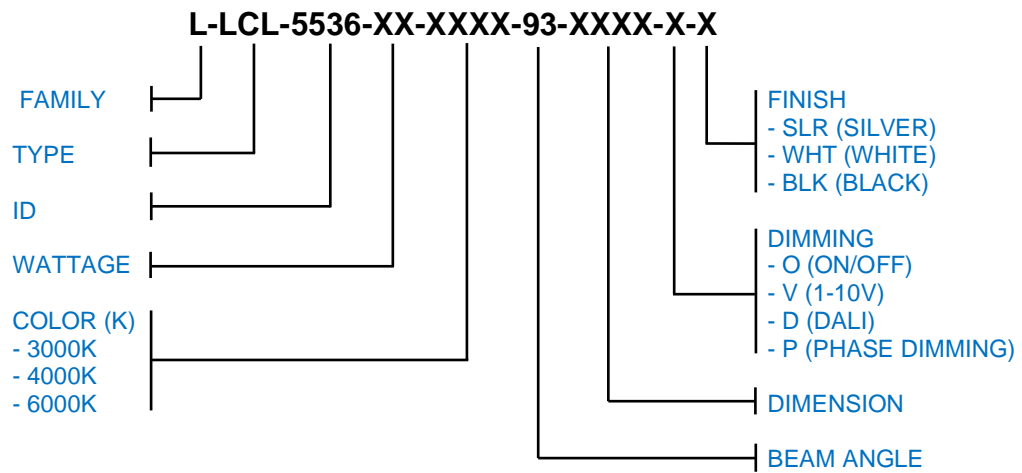

LUMEN

AT WORK

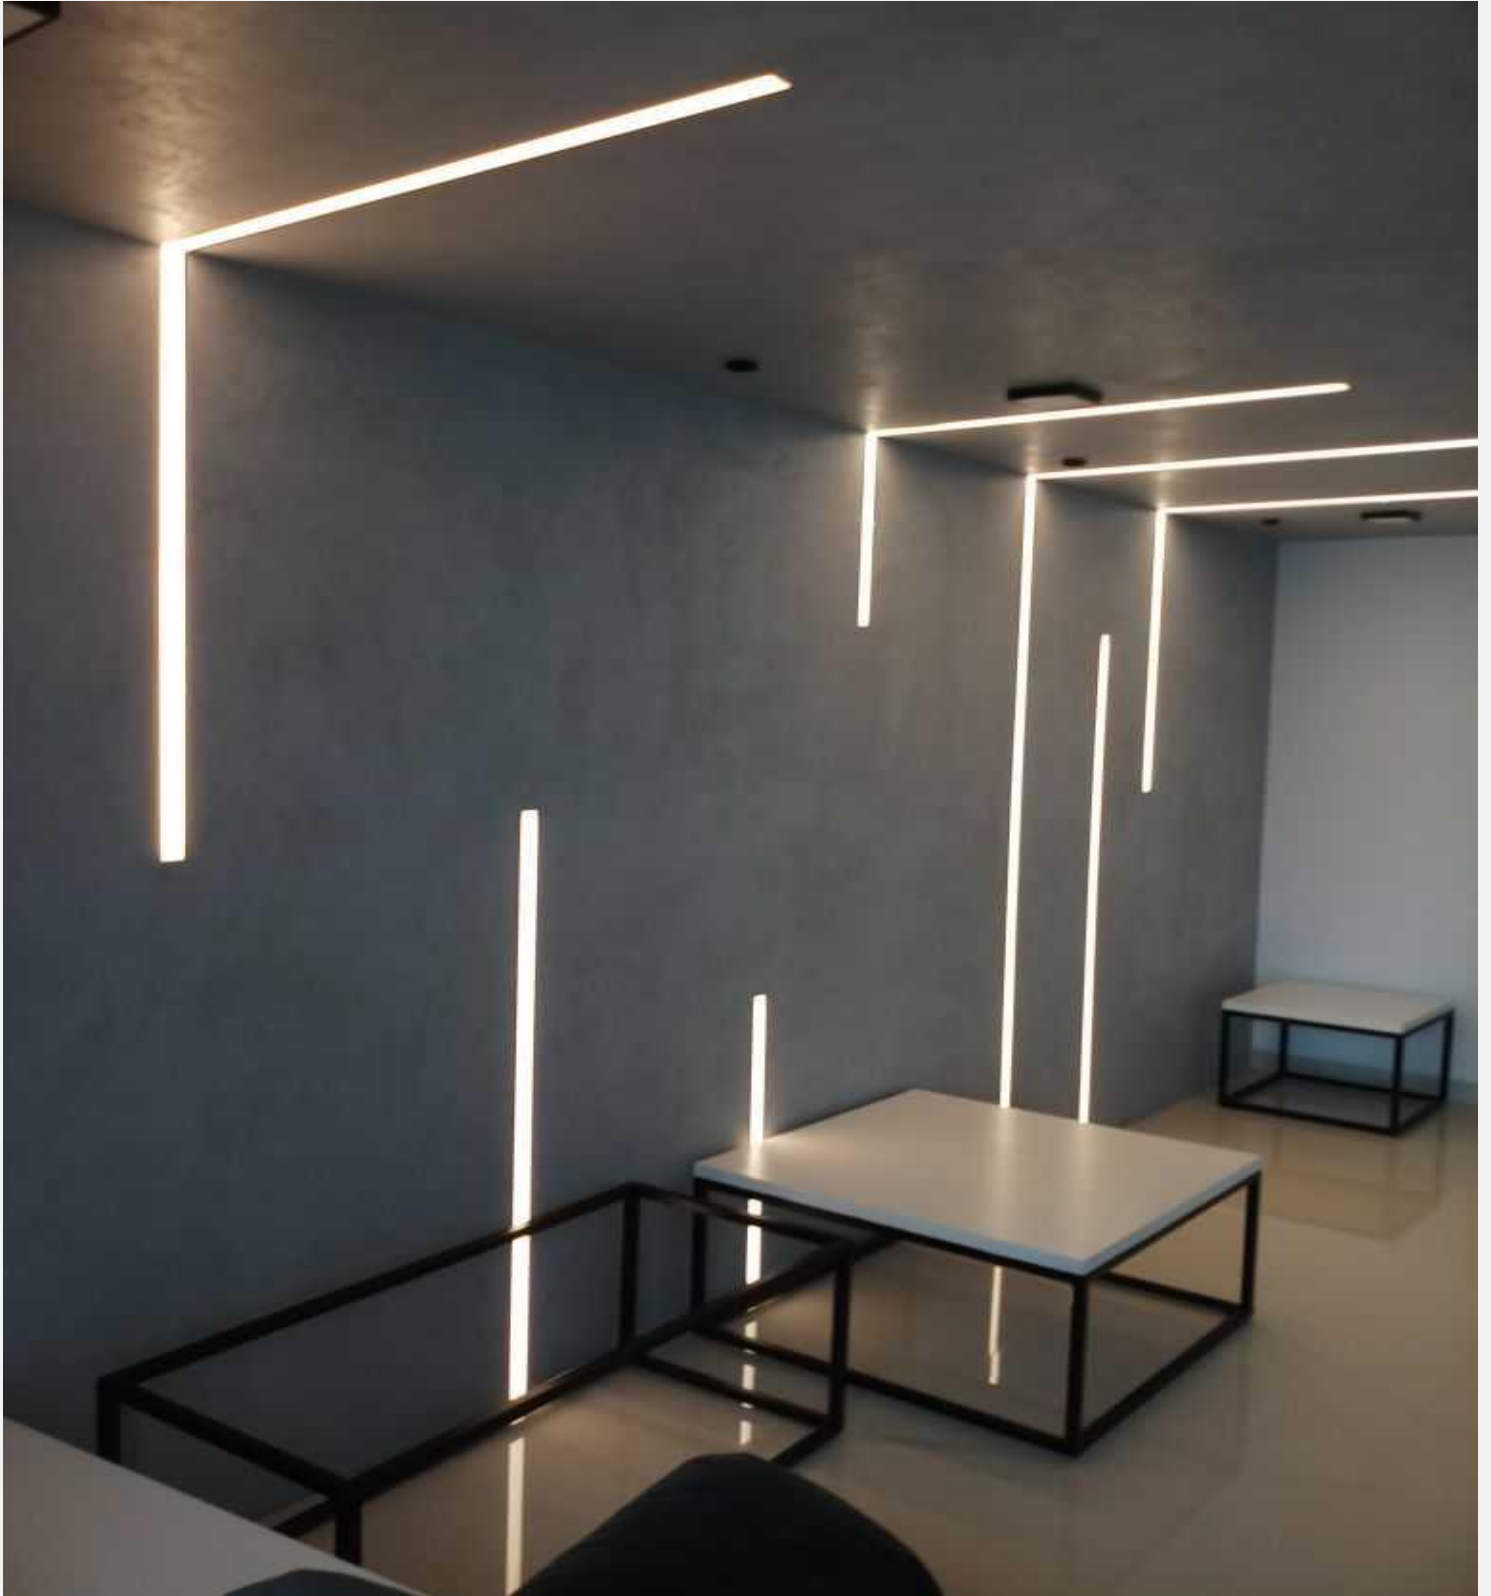

contact@lumen-at-work.com | www.lumen-at-work.com

© LUMEN AT WORK. All rights reserved. The information provided herein is subject to change, without notice.