

RECESSED SPOTLIGHT

S-SPT-FLW131



Grid style square shape recessed mounted spotlight. Adjustable with 350 degrees rotation. Easy clips installation. Available with full range of light shaping accessories. Any RAL finish available.

Ajustable avec 350 degrés de rotation. Installation simple par clips. Couleurs standards noir ou blanc. La couleur de votre choix est disponible sur demande pour s'adapter à votre signalétique de marque.


AC Input	220 – 240 V	<i>Alimentation</i>
Light Source	COB	<i>Source</i>
Wattage	1x28W	<i>Puissance</i>
Lumen Output	2900Lm	<i>Flux lumineux</i>
Efficiency	104Lm/W	<i>Efficacité</i>
Beam Angle	12° 24° 36°	<i>Angles</i>
Color (K)	2700°K 3000°K 4000°K	<i>Température de couleur</i>
Finish	Black White	<i>Finition</i>
Working Temperature	-20° / +40°C	<i>Température de fonctionnement</i>
Lifetime	50,000h	<i>Durée de vie</i>

Standard	L80B10	<i>Norme</i>
Protection	IP20	<i>Indice</i>
Dimming (Option)	DALI 1-10V Phase Dimming	<i>Contrôle (Option)</i>
Certification	CE RoHS	<i>Certification</i>
CRI	80 90	<i>IRC</i>
Safety Class	□	<i>Classe de sécurité</i>
EN62471	RG0	<i>EN62471</i>
SDCM	≤3	<i>SDCM</i>
UGR	≤19	<i>UGR</i>


Product Photo | *Photo du produit*




Dimensions | *Dimensions*

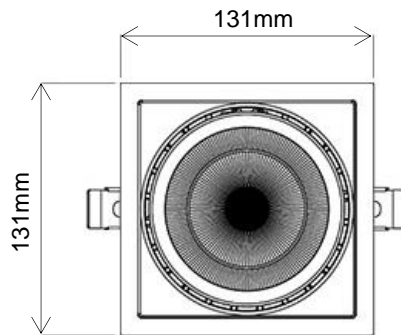

Cut hole 120*120mm

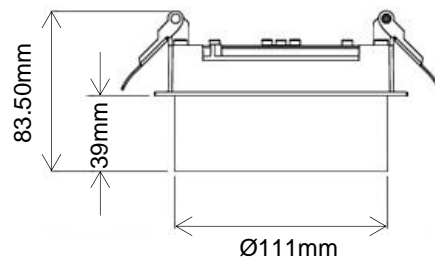


Product Code Generator | *Générateur de code produit*

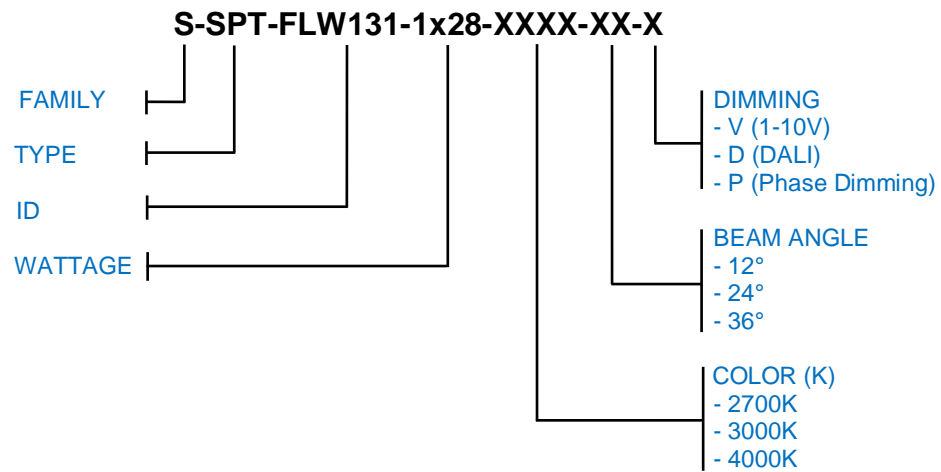

Accessories | *Accessoires*

1. Anti-glare ring | *Coupe-flux*
2. Oval Filter | *Filtre oval*
3. Square Filter | *Filtre carré*
4. Honeycomb | *Nid d'abeille*
5. Snoot | *Nez*
6. Baffle | *Casquette*

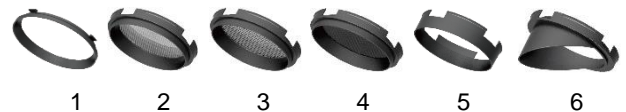

LUMEN

AT WORK



contact@lumen-at-work.com | www.lumen-at-work.com

© LUMEN AT WORK. All rights reserved. The information provided herein is subject to change, without notice.