

RECESSED SPOTLIGHT

S-SPT-FLW35



Square recessed trimless design spotlight. It can be rotated 350 degrees. Can be fitted with full range of light shaping accessories. Any RAL finish available.

Spot encastrable au plafond carré, sans collerette (trimless). Orientable sur 350°. Il peut être équipé d'une gamme complète d'accessoires pour ajuster la lumière selon vos besoins. Version standard en blanc ou noir, tout autre RAL sur demande.


AC Input	220 – 240 V	<i>Alimentation</i>
Light Source	COB	<i>Source</i>
Wattage	28W	<i>Puissance</i>
Lumen Output	2900Lm	<i>Flux lumineux</i>
Efficiency	104Lm/W	<i>Efficacité</i>
Beam Angle	12° 24° 36°	<i>Angles</i>
Color (K)	3000°K 4000°K	<i>Température de couleur</i>
Finish	Black White	<i>Finition</i>
Working Temperature	-20° / +40°C	<i>Température de fonctionnement</i>

Lifetime	50,000h	<i>Durée de vie</i>
Standard	L80B10	<i>Norme</i>
Protection	IP20	<i>Indice</i>
Dimming (Option)	DALI 1-10V Phase Dimming	<i>Contrôle (Option)</i>
Certification	CE RoHS	<i>Certification</i>
CRI	80 90	<i>IRC</i>
Safety Class	□	<i>Classe de sécurité</i>
EN62471	RG0	<i>EN62471</i>
SDCM	≤3	<i>SDCM</i>
UGR	≤19	<i>UGR</i>

Product Photo | *Photo du produit*




Dimensions | *Dimensions*

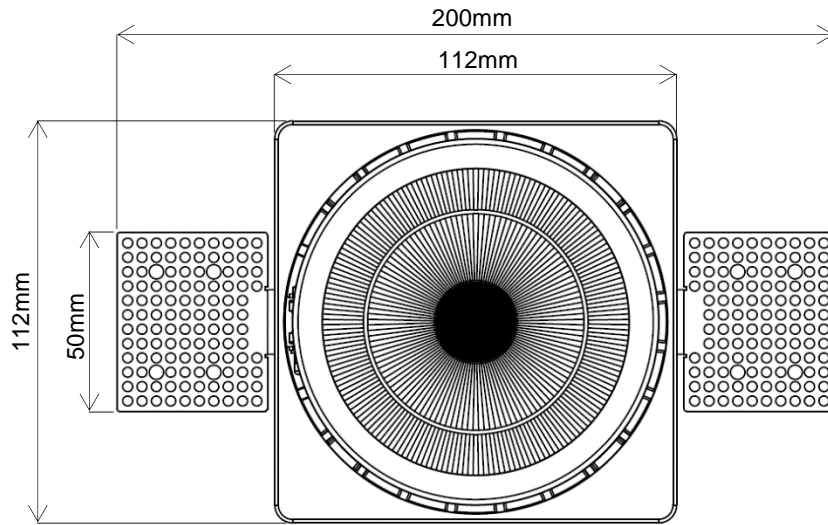

Cut hole 114*114mm




Product Code Generator | *Générateur de code produit*

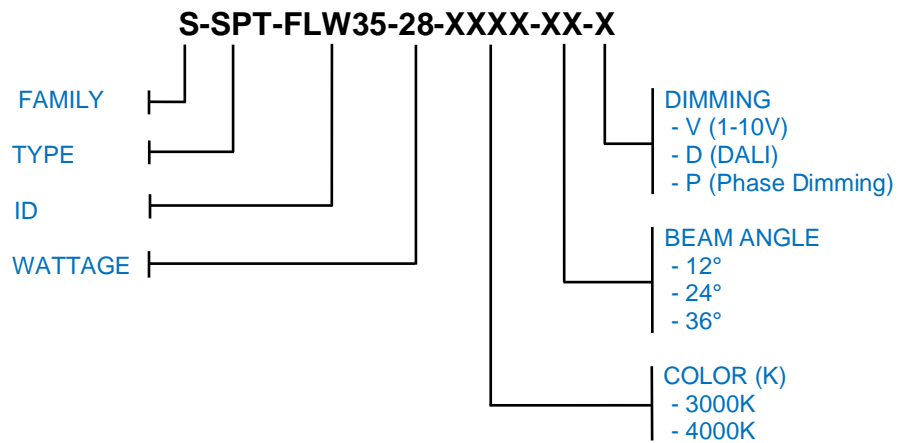


Accessories | *Accessoires*

1. Anti-glare ring | *Coupe-flux*
2. Oval Filter | *Filtre oval*
3. Square Filter | *Filtre carré*
4. Honeycomb | *Nid d'abeille*
5. Snoot | *Nez*
6. Baffle | *Casquette*



LUMEN

AT WORK

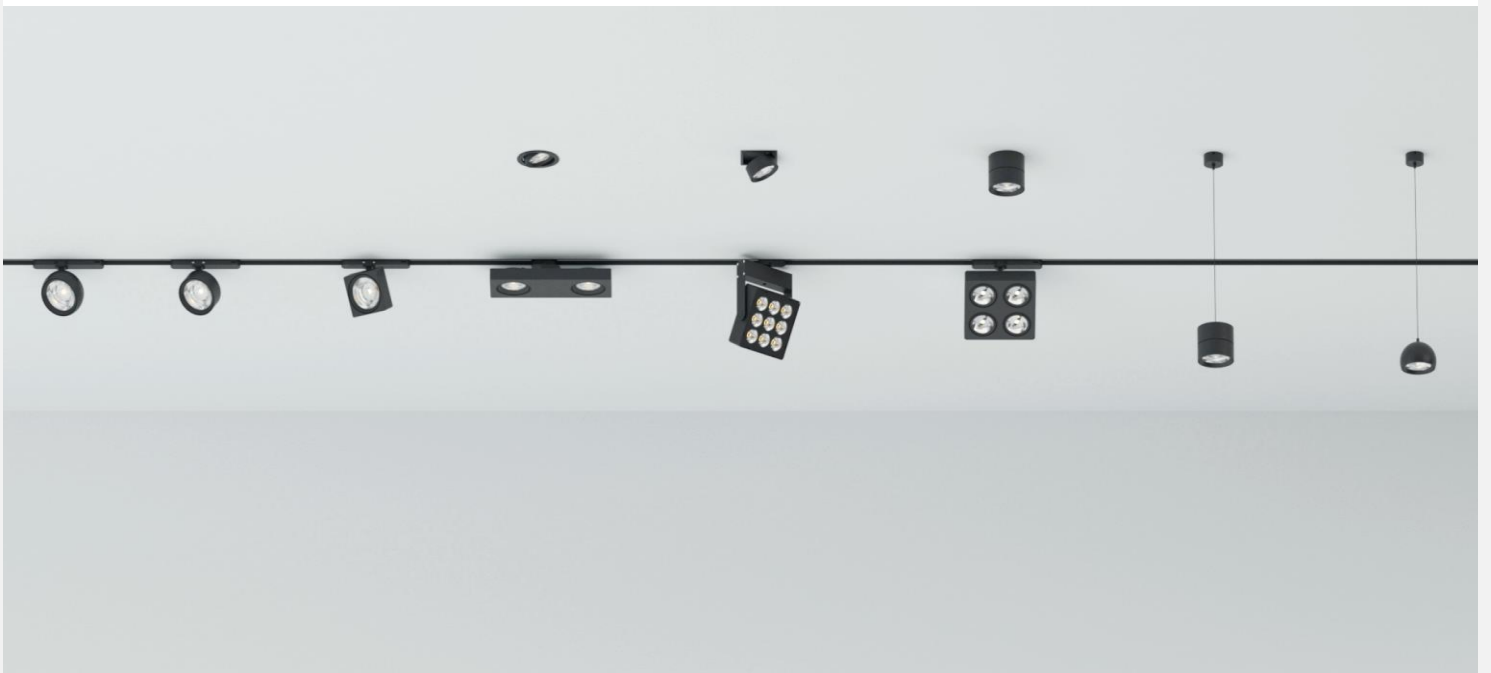

contact@lumen-at-work.com | www.lumen-at-work.com

© LUMEN AT WORK. All rights reserved. The information provided herein is subject to change, without notice.