

DOWNLIGHT HAUTE COUTURE

O-DWN-HC450




High output downlight aluminium 30-degree tilt angle recessed fitting with beam angle available in 14°, 20°, 32° and 56°. Easy clip installation and tool free connector.

Luminaire encastré à angle d'inclinaison de 30 degrés en aluminium à haut rendement avec angle de faisceau disponible en 14°, 20°, 32° et 56°. Installation facile des clips et connecteur sans outil.

AC Input	100 – 240 V	<i>Alimentation</i>
Light Source	COB	<i>Source</i>
Wattage	8W	<i>Puissance</i>
Lumen Output	580Lm	<i>Flux lumineux</i>
Efficiency	73Lm/W	<i>Efficacité</i>
Beam Angle	14° 20° 32° 56°	<i>Angles</i>
Dimensions (Cut hole)	60mm dia	<i>Dimensions</i>
Color (K)	2700°K 3000°K 4000°K	<i>Température de couleur</i>
Finish	Black White	<i>Finition</i>
Working Temperature	-30° / +50°C	<i>Température de fonctionnement</i>
Lifetime	50,000h	<i>Durée de vie</i>

Standard	L80B10	<i>Norme</i>
Protection	IP20	<i>Indice</i>
Dimming (Option)	DALI 1-10V Phase Dimming	<i>Contrôle (Option)</i>
Certification	CE RoHS	<i>Certification</i>
CRI	90	<i>IRC</i>
Safety Class	□	<i>Classe de sécurité</i>
EN62471	RG0	<i>EN62471</i>
SDCM	≤3	<i>SDCM</i>
UGR	≤19	<i>UGR</i>

Product Photo | *Photo du produit*

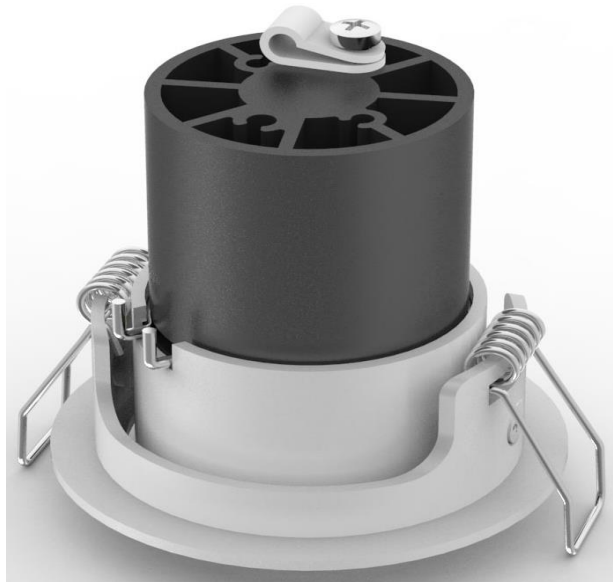

LUMEN

AT WORK



contact@lumen-at-work.com | www.lumen-at-work.com

© LUMEN AT WORK. All rights reserved. The information provided herein is subject to change, without notice.