

LED PANEL SQUARE


O-PNL-30B



The 30B panel is a backlit panel with 120Lm/W efficiency. The backlit technology ensures better heat dissipation and uniformity on the diffuser. Light weight and easy to install, this versatile product will suit all your needs for tertiary lighting. It comes with microprismatic diffuser. Available in standard dimensions 600x600mm and 300x1200mm.

La dalle 30B est une dalle rétro éclairée avec un rendement de 120 Lm/W. La technologie rétro éclairée permet une meilleure uniformité ainsi qu'une dissipation de chaleur améliorée. Très légère et facile à installer, cette dalle est idéale pour l'éclairage de bureaux. Disponible avec diffuseur micro prismatique, en différentes dimensions : 600x600mm and 300x1200mm.


Input	AC185 – 265V	<i>Alimentation</i>
Light Source	SMD	<i>Source</i>
Wattage	15W 30W	<i>Puissance</i>
Lumen Output	1500Lm 3600Lm	<i>Flux lumineux</i>
Efficiency	100Lm/W 120Lm/W	<i>Efficacité</i>
Beam Angle	120°	<i>Angles</i>
Color (K)	3000°K 4000°K 6000°K	<i>Température de couleur</i>
Working Temperature	-25° / +40°C	<i>Température de fonctionnement</i>
Driver	ON/OFF	<i>Driver</i>
Driver Location	Deported	<i>Emplacement Driver</i>
Dimming (Option)	0-10V DALI	<i>Gradation (Option)</i>

Protection	IP20	<i>Indice de protection</i>
CRI	80+	<i>IRC</i>
Safety Class		<i>Classe de sécurité</i>
EN62471	RG0	<i>EN62471</i>
SDCM	≤3	<i>SDCM</i>
UGR	≤19	<i>UGR</i>
Finish	White	<i>Finition</i>
Dimensions	295mm x 295mm 595mm x 595mm 295mm x 1195mm	<i>Dimensions</i>
Lifetime	50,000h	<i>Durée de vie</i>
Standard	L90B10	<i>Norme</i>
Certification	CE RoHS	<i>Certification</i>
Warranty	5 years	<i>Garantie</i>

Product Photo | *Photo du produit*



Dimensions | *Dimensions*

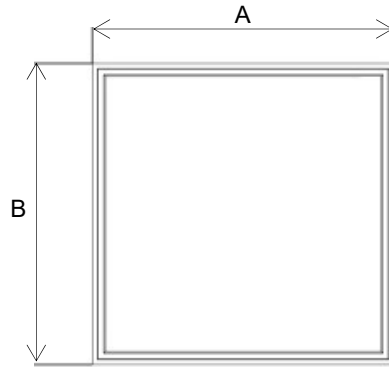

Model	Size A (mm)	Size B (mm)
O-PNL-30B-300	295mm	295mm
O-PNL-30B-600	595mm	595mm
O-PNL-30B-1200	1195mm	295mm


UGR 19 Micro-Prismatic | *UGR 19 Micro-Prismatique*



Accessories | *Accessoires*



Connection Box

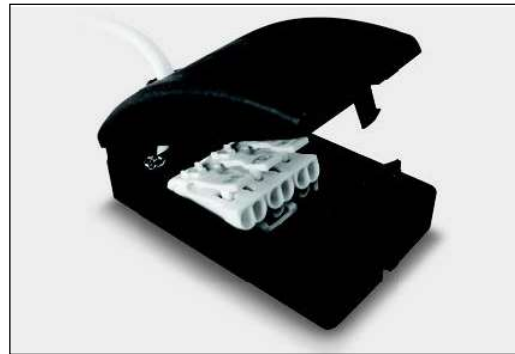

Connection Box



Security Cable

Product Code Generator | *Générateur de code produit*

